

Blindspace® \$100X100\$\$ [3.94x3.94"]

for Standard Roller Blind


HEAD BOX S100x100SS



SIDE BOX S100x50SS (OPTIONAL)



HEM BAR BOX S100x50SS (OPTIONAL)

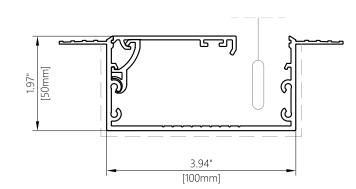

6"-1' scale

PRODUCT REFERENCE

S**100x100**SS

SERIES SIZE CORNERS

CONCEALMENT CONFIGURATION OPTIONS








Head Box + Side Boxes

Head Box

+ Side Boxes + Hem Bar Box


BOX VARIATIONS





S100x100NN No Flanges

S100x100NS Skim Coat Flange on one side (reversible)





S100x100SS Skim Coat Flange on both sides

COVER HINGE to hold cover plate, installed on either side

| Product | Blindspace \$100X100\$\$ [3.94x3.94"], \$100X50\$\$ [3.94x1.97"] |
|-------------------------|--|
| Description | Recessed box with optional flanges and hinged cover to conceal blinds flush with wall or ceiling finished surface. |
| Blind sizes | Please see size chart and supplier details for blind sizes such as max. width, height and area. |
| Finishes | Provided in RAL 9016 (white) Optional powder coating to other RAL colours available. |
| Material | Powder Coated Aluminium, EN 6063 T6 |
| Optional accessories | End cap Splice pin (to align boxes) Splice plate (to align covers) Chain guide (for manual blinds) Covers in various widths |
| Box length | 19'-8.2"[6000mm] Cut to size for shorter lengths. Spliced together for longer lengths. |
| Installation | Boxes to be fixed with countersunk screws every 7.87" [200mm] through back (and both flanges when available) into appropriate backing. Scrim tape to be used on flanges. Finished plaster level to be flush with cover. Allow 0.12" [3mm] recess space for ease of installation, shown in dash line around boxes |
| Print date | 2023/06/14 |
| Page size | ANSI B 11x17" |
| Print file | blindspace s100x100ss with standard roller blind [inch].dwg |

Blindspace AB